
### CIRCULAR BREAKING SAW Model SEC 180



The Jarvis Model SEC 180 electrically powered circular breaking saw.

- The SEC 180, with an adjustable 2.6 inch (66 mm) depth of cut, is ideally suited for:
  - Pork: ribbing, ham marking, shoulder marking and removing contaminated back bones.
- Double insulated, 1.6 hp electric motor for ultimate performance.
- Electronic brake for 3 second blade stop.
- Switch is protected against moisture and dirt for sustained trouble-free operation.
- Lightweight and flexible allows operators to work with meat that is hanging or on the table.
- Meets national and international requirements for hygiene and safety.



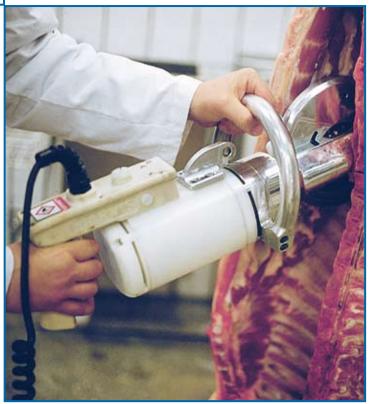

## **SMOOTH - POWERFUL - RUGGED**

### **CIRCULAR BREAKING SAW** Model SEC 180

Specifications		
Drive		Electric
Model SEC 180		
Motor Power	1.6 hp	1200 W
Operating Voltage	220 / 115 / 42 V,	1 phase, 50 / 60 Hz
Blade Speed		1350 rpm
Control Handles		
Single Trigger / Dual Handle	es	Electric
Blade Diameter	7.1 in	180 mm
Cutting Depth (maximum)	up to 2.6 in	66 mm
Overall Length	21.7 in	551 mm
Weight	13.2 lbs	6 kg
Vibration	less (<) 120 dB	<1 m / sec <sup>2</sup>
Noise (1 meter from tool)		92 dB
Equipment Selection and Accessories		Ouden Neurskern
Equipment Selection and Access	sories	Order Number
		Order Number
Model SEC 180 with Non-Indexing	g Depth Gage	
Model SEC 180 with Non-Indexing External Brake	g Depth Gage 42 V, 1 phase, 50 / 60 Hz	4004047
Model SEC 180 with Non-Indexing	g Depth Gage	
Model SEC 180 with Non-Indexing External Brake Internal Brake Internal Brake	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz	4004047 4004048
Model SEC 180 with Non-Indexing External Brake Internal Brake Internal Brake	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz	4004047 4004048
Model SEC 180 with Non-Indexing External Brake Internal Brake Internal Brake Model SEC 180 with Indexing Dep	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz oth Gage	4004047 4004048 4004049
Model SEC 180 with Non-Indexing External Brake Internal Brake Internal Brake Model SEC 180 with Indexing Dep External Brake External Brake External Brake	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz oth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz	4004047 4004048 4004049 4004122
Model SEC 180 with Non-Indexing External Brake Internal Brake Internal Brake Model SEC 180 with Indexing Dep External Brake External Brake	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz oth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz	4004047 4004048 4004049 4004122 4004133
Model SEC 180 with Non-Indexing External Brake Internal Brake Internal Brake Model SEC 180 with Indexing Dep External Brake External Brake External Brake	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz oth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz	4004047 4004048 4004049 4004122 4004133 4004133
Model SEC 180 with Non-Indexing External Brake Internal Brake Model SEC 180 with Indexing Dep External Brake External Brake External Brake Internal Brake Internal Brake	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz oth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz	4004047 4004048 4004049 4004122 4004133 4004134 4004104 4004085
Model SEC 180 with Non-Indexing External Brake Internal Brake Model SEC 180 with Indexing Dep External Brake External Brake External Brake Internal Brake Internal Brake	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz	4004047 4004048 4004049 4004122 4004133 4004134 4004104 4004085 4004092
Model SEC 180 with Non-Indexing External Brake Internal Brake Model SEC 180 with Indexing Dep External Brake External Brake External Brake Internal Brake Internal Brake	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 300 Hz 300 Hz Hz 300 Hz 300 Hz Hz 300 Hz	4004047 4004048 4004049 4004122 4004133 4004134 4004104 4004085 4004092 4004093
Model SEC 180 with Non-Indexing External Brake Internal Brake Model SEC 180 with Indexing Dep External Brake External Brake External Brake Internal Brake Internal Brake	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz	4004047 4004048 4004049 4004122 4004133 4004134 4004104 4004085 4004092
Model SEC 180 with Non-Indexing External Brake Internal Brake Model SEC 180 with Indexing Dep External Brake External Brake Internal Brake Internal Brake Internal Brake Model SEC 180 with Dual Trigger	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz and External Brake 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz	4004047 4004048 4004049 4004122 4004133 4004134 4004104 4004085 4004092 4004093 4004094
Model SEC 180 with Non-Indexing External Brake Internal Brake Model SEC 180 with Indexing Dep External Brake External Brake Internal Brake Internal Brake Internal Brake SEC 180 with Dual Trigger	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz	4004047 4004048 4004049 4004122 4004133 4004134 4004104 4004085 4004092 4004093 4004094 1023439
Model SEC 180 with Non-Indexing External Brake Internal Brake Model SEC 180 with Indexing Dep External Brake External Brake Internal Brake Internal Brake Internal Brake SEC 180 with Dual Trigger	g Depth Gage 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz and External Brake 42 V, 1 phase, 50 / 60 Hz 115 V, 1 phase, 50 / 60 Hz 220 V, 1 phase, 50 / 60 Hz	4004047 4004048 4004049 4004122 4004133 4004134 4004104 4004085 4004092 4004093 4004094

# JARVIS

#### Products for the meat and poultry industry

Jarvis Products Corporation · 33 Anderson Road · Middletown, CT 06457-4926 · United States of America Telephone (860) 347-7271 · Fax (860) 347-9905 · sales@jarvisproducts.com www.jarvisproducts.com