


BEEF BRISKET SAW



Models MG-1/ 1HS / 1B / 1BHS / 1BFQ

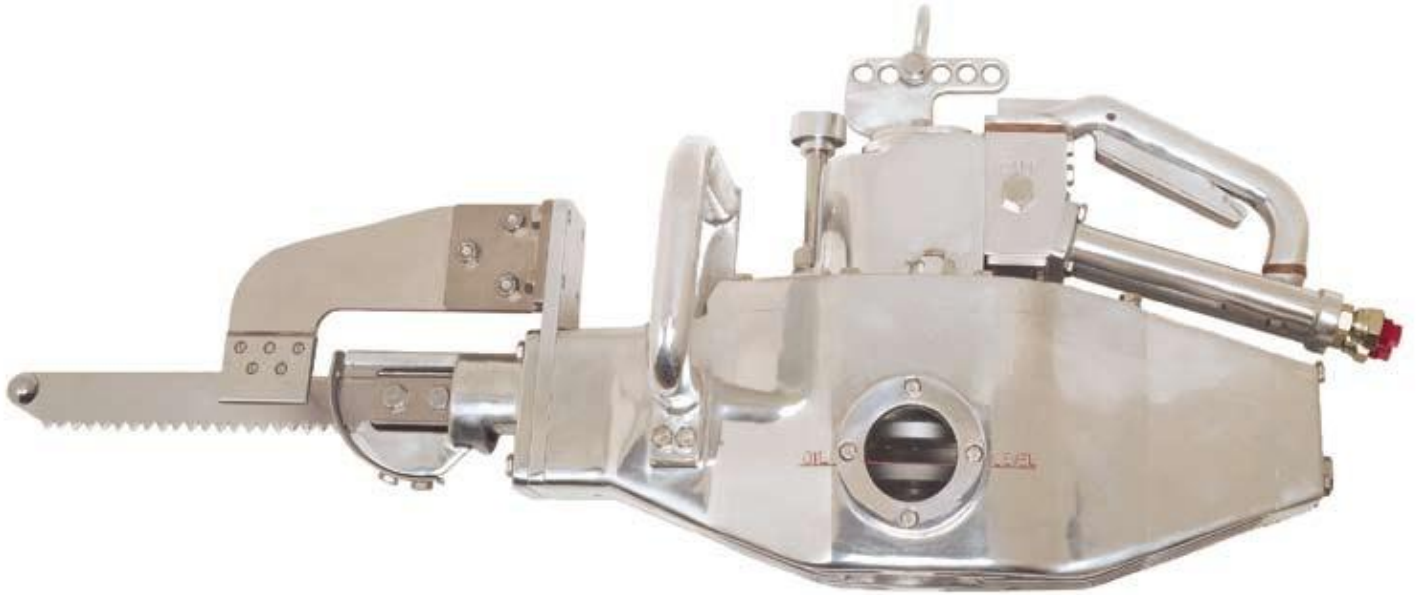

The Jarvis Models MG-1, MG-1HS, MG-1B, MG-1BHS and MG-1BFQ - hydraulic powered brisket saws for beef, hog splitting and forequartering.

JARVIS

- The powerful MG-1 cuts through all beef briskets quickly and easily. The high performance MG-1B is even faster, suitable for kills over 200 beef / hour. Models MG-1HS and MG-1BHS are ideal for hog splitting and hog brisket cutting. Model MG-1BFQ is the perfect saw for forequartering.
- The MG-1 and MG-1HS cuts fat cattle briskets in 5 seconds, the MG-1B, MG-1BHS and MG-1BFQS in 3 seconds.
- Small and maneuverable for optimum handling.
- A balanced drive system makes all MG-1 models smooth and quiet for less operator fatigue.
- Minimal maintenance due to the oil bath lubricated drive and no electrical components.
- Meets international requirements for safety and hygiene.

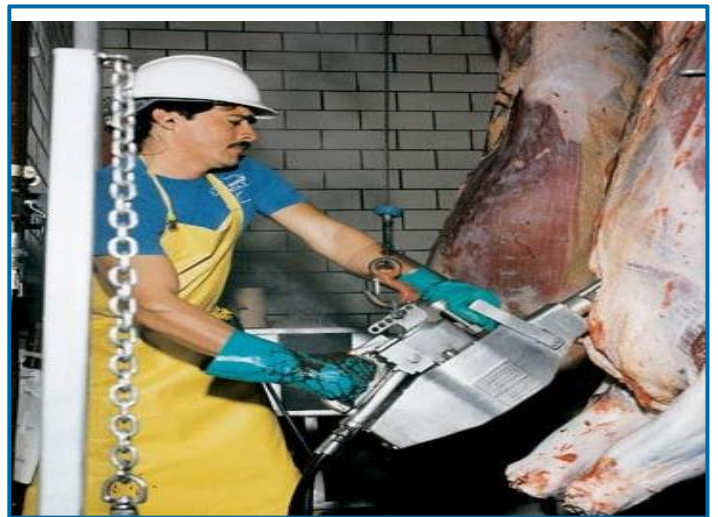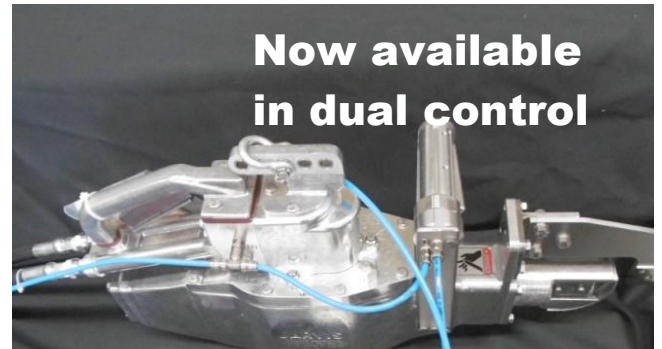

SMOOTH - FAST - DURABLE

BEEF BRISKET SAW

Model MG-1/ 1HS / 1B / 1BHS / 1BFQ

Specifications

Drive						hydraulic
Model MG-1 / MG-1HS / MG-1B / MG-1BHS / MG-1BFQ						
Cutting Cycle Time						
MG-1, 1HS						5 sec
MG-1B, 1BHS, 1BFQ						3 sec
Cut Speed at 3000 rpm (MG-1, 1HS)			12000 in / min	30480 cm / min		
Cut Speed at 3500 rpm (MG-1B, 1BHS, 1BFQ)			14000 in / min	35560 cm / min		
Control Handle			Single Trigger	Hydraulic		
Blade Lengths						
Hog Splitting	18.0 in	457 mm	Beef	9.5 in	241 mm	
Hog Splitting	22.0 in	559 mm	Beef	10.5 in	267 mm	
Forequartering	16 in	406 mm	Beef	11.5 in	292 mm	
Forequartering	18 in	457 mm	Beef	13.0 in	330 mm	
Overall Length (with 9.5 in / 241 mm blade)			31 in	787 mm		
Weight						
MG-1, 1B			41 lbs	18.6 kg		
MG-1HS, 1BHS, 1BFQ			63 lbs	28.6 kg		
Hydraulic Power Unit - 4027279 and 4027265						
Motor Power			5 hp	3728 W		
Operating Voltage			460 / 230 V, 3 phase, 60 Hz			
			other voltages and 50 Hz available			
Pump Output	4027279 (3 gpm / 11.4 Lpm)		4027265 (5 gpm / 18.9 Lpm)			
Hose Length			16 ft	5 m		
Oil Capacity			20 gal	76 L		
Overall Dimensions (l x w x h)			31.5 x 21.5 x 30 in	800 x 546 x 762 mm		
Weight (without oil)			250 lbs	113 kg		

Equipment Selection and Accessories				Order Number
Model MG-1				4005013
Model MG-1B				4005037
MG-1HS				4005012
MG-1BHS				4005039
MG-1BHS (Shower Head)				4005081
Model MG-1BFQ				4005131, 4005079, 4005085, 4005100
Blade (length), MG-1,1B		9.5 in	240 mm	1023083
		10.5 in	270 mm	1023084
		11.5 in	290 mm	1023215
		13.0 in	330 mm	1023230
		18.0 in	457 mm	1023088
Blade (length), MG-1HS, MG-1BHS		21.9 in	556 mm	1023090
Blade (length), MG-1FQ		3 teeth per inch	16.3 in	414 mm
		3 teeth per inch	18.0 in	457 mm
		3 teeth per inch (alternating)	16 in	406 mm
		3 teeth per inch (alternating)	18 in	457 mm
		4 teeth per inch	16.3 in	414 mm
		5 teeth per inch	16.3 in	414 mm
		HD	21.9 in	556 mm
Hydraulic Power Unit with hydraulic hoses, 460 / 230 V, 3 phase, 60 Hz*				
Model MG-1, 1HS, 3.1 gpm (11.7 lpm) output				4027279
Model MG-1B, 1BHS, 1BFQ, 5 gpm (18.9 lpm) output				4027265
Balancer		MG-1, MG-1B		4042035
		MG-1HS, MG-1BHS, MG-1BFQ		4042047



* For other configurations: please specify voltage, hertz, and intended country of operation when ordering.

Products for the meat and poultry industry

Jarvis Products Corporation · 33 Anderson Road · Middletown, CT 06457-4926 · United States of America
 Telephone (860) 347-7271 · Fax (860) 347-9905 · sales@jarvisproducts.com · www.jarvisproducts.com